

7901403

sport

Volvo B230 B19 - B21 - B23 - B230

I-4cyl 2.3L 8v SOHC (DTs/DTs)



intake **exhaust**

camshaft data:


lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 293°	283°
duration @ 1.0mm	: 256°	247°
valve lift	: 11.95mm	11.50mm
cam lift	: 11.95mm	11.50mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 20° / 56°	52° / 15°
valve lift @ TDC	: 3.75mm	3.10mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 30kg @ 38.0mm	: 30kg @ 38.0mm
max. load / lift	: 80kg @ 12.0mm	: 80kg @ 12.0mm

REMARKS :

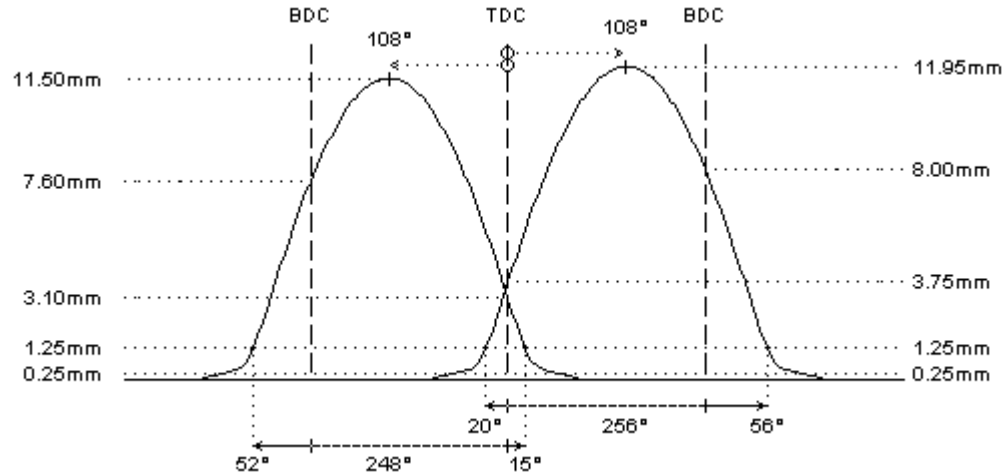

REMARKS :

Volvo has used many different camshaft specifications. Please indicate STD cam base diameter and height when ordering sports camshafts. Depending on the engine version and application, extra modifications may be required.